

LEYCO-FLEX


**SELF ADHESIVE,
BITUMINOUS/ASPHALT
WATERPROOFING MEMBRANES
PROTECTED WITH FILMS OR
SYNTHETIC MATERIALS**

FLXIBLE AND ADAPTABLE

Flexibility and adaptability are the most important qualities of LEYCO-FLEX WATERPROOFING : thanks to high technological solutions, these membranes can resist elongation and mechanical stresses like no other system or waterproofing material can. In fact, LEYCO-FLEX WATERPROOFING products are based on high-tech films coated on an elastoplastic bituminous compound making the product self adhesive, and permits an effective use as waterproofing, sound and vapour barriers, underlayers, etc.

EASY INSTALLATION

LEYCO-FLEX WATERPROOFING is cold applied without the use of torch or special tools and skills. Thanks to the excellent adhesion of the membranes, a fast and long-lasting waterproofing is obtained on building materials such as : metal, wood, glass, zinc, aluminium, cement or clay tiles, concrete, stone, asbestos cement and a wide variety of plastic products : polyethylene, polypropylene, fiberglass, polycarbonato and some P.V.C. types. The membranes, moreover, can be installed directly on inflammable materials, on insulation panels that are not fire resistant, and in particular environments where the use of naked flames is dangerous

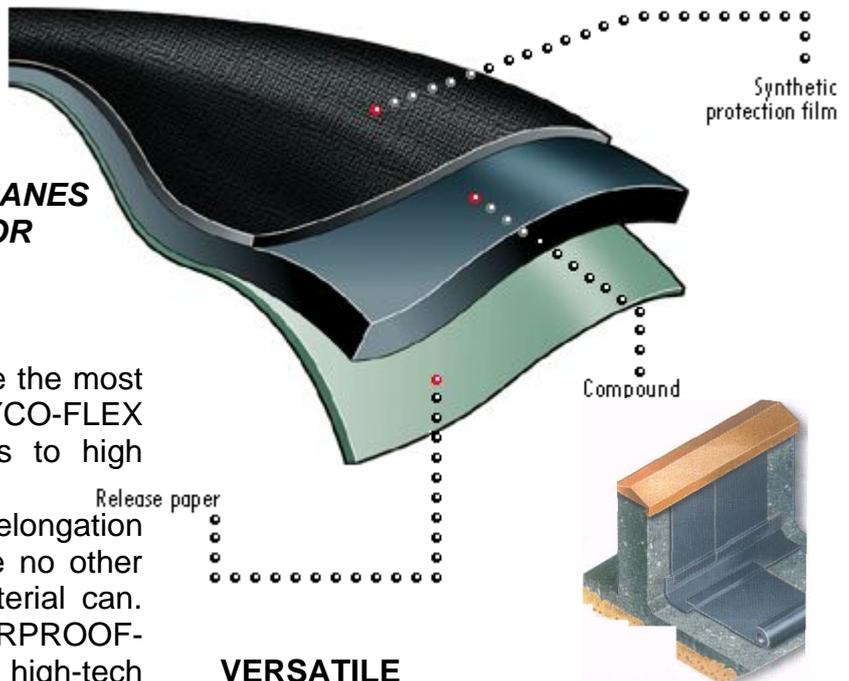


VERSATILE

A great versatility of use is assured by specific factors of LEYCO-FLEX WATERPROOFING: softness, lightness, extensibility and high workability. In those situations where traditional torch-on or fastened systems, extremely dangerous and not very functional, cannot be used, LEYCO-FLEX membranes provide the best results without compromising the quality, the characteristics and the work done.

LEYCO-FLEX membranes, effective in all the "traditional" and programmed situations, is also the ideal solution for prompt and urgent repairs, assuring in every case, long lasting results.

CONTROLLED QUALITY

The quality control is another important element of LEYCO-FLEX products : each stage of production, packaging, the customization, storage and the transportation, are subject to a strict and constant control, in accordance to the highest quality standards and control methods.



INNOVATIVE

he innovation is the feature that distinguishes LEYCO-FLEX WATERPROOFING membrane from the traditional torch-on or fastened systems.

- The absolute waterproofing resists high hydrostatic pressure.

- Being cold applied and installed without the use of naked flames, they offer a higher safety level on the job.



- If being installed using nails or other fasteners, or even if cut accidentally, the membrane self seals on contact.

- The constant thickness of LEYCO-FLEX WATERPROOFING is assured by high-tech, automatic and modern machinery.

- The chemical resistance allows LEYCO-FLEX membranes to be highly resistant to acids, alkalis or other pollutants.




Self adhesive, bituminous waterproofing membranes, used all over the world in extreme climatic conditions, these membranes have become a valid, safe and irreplaceable waterproofing system for 25 years.

The membranes are in full accordance with specifications for tenders and turnkey packages, where products are subject to extremely severe control

procedures aimed at assessing their compatibility in the most difficult conditions.

LEYO-FLEX membranes enhance at the maximum level these characteristics, providing two additional unique features: innovation and controlled quality.

That's why LEYCO-FLEX WATERPROOFING, just like all the products guaranteed by LEYCOCHEM, has matched the requirements set by the most renown brands in the industry.

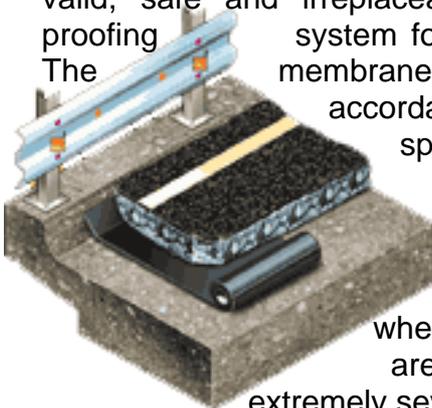

ANTI-TEARING

Some LEYCO-FLEX membrane types are endowed with a special tear resistant reinforcement which avoids tearings and damages of the metal sheet.



RESISTANT

The membranes produced by LEYCO-FLEX will remain undamaged by elevated elongation and mechanical strength. Totally waterproofing, the membranes resist to high hydrostatic strengths. They are unaffected by chemical agents: acids, soaps and pollutants.



ALL WEATHER

Resistant to atmospheric agents, including pollutants and UV rays, LEYCO-FLEX's membranes can be used in all weather seasons



FLEXIBILITY

Thanks to their unique and patented technology, LEYCO-FLEX membranes are soft, plasticized and with out elastic memory.



COLD APPLIED

Cold applied, without using fire or glues. LEYCO-FLEX's membranes can be applied on inflammable material.



ECOLOGICAL

LEYCO-FLEX's membranes are products with processes and components of a low ecological impact. The use of them, do not require polluted additives or chemical solvents.



INSULATION

Some membranes allow to realize anti corrosion and dielectric protection in extreme ambiances with their high performance characteristics.



EASY APPLICATION

Easy and fast to apply, LEYCO-FLEX membranes can be applied by non-professionals to obtain correct waterproofing or sealant jobs, using few and simple tools.

Manufactured by:

LeycoChem LEYDE GmbH Germany

Industriestrasse 155 Tel.:+49(0)2236-96600-0
P.O. Box 501627 Fax:+49(0)2236-96600-10
D-50999 Köln/Cologne Email: leycochem@leyde.com

LEYCOCHEM-IRAQ Baghdad

Tel.: 0750-4344200

Tel.:0770-8748222

Tel.:0781-3802151

Email: sales.leycochem.iraq@leyde.com

Email: admin.leycochem.iraq@leyde.com

www.leyde.com